

SECTION


TESTED & COMMERCIAL  
CHAIN & COMPONENTS



## REGULAR LINK PROOF COIL CHAIN – SELF COLOUR


Designed with link dimensions suitable for a wide variety of general purpose uses.

Product Code	Part No.	Chain Size (mm)	ABL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02609006	40019	6	0.32	6.0	28.0	24.0	144.1
02609008	40024	8	0.53	7.6	35.8	29.2	90.6
02609010	40029	10	0.86	9.5	43.4	35.5	59.0
02609013	40034	13	1.50	12.0	51.7	44.5	35.5
02609016	40038	16	2.31	16.0	59.6	57.3	19.0
02609020	40040	20	3.67	20.0	73.3	71.0	12.3
02609024	40042	24	5.34	24.0	87.0	84.8	8.6

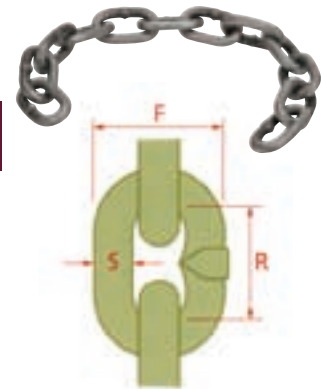


## REGULAR LINK PROOF COIL CHAIN – HOT DIP GALVANISED

Product Code	Chain Size (mm)	ABL (t)	S (mm)	R (mm)	F (mm)	Links /Metre	Metres /100kg
02605403	3	0.06	3.15	15.7	13.4	63.7	454.6
02605404	4	0.11	4.0	18.6	16.2	53.8	303.0
02605405	5	0.19	5.0	22.0	19.6	45.5	188.7
02605406	6	0.32	6.3	26.4	24.0	37.9	120.5
02605408	8	0.53	8.0	34.3	30.1	29.2	78.1
02605410	10	0.86	10.0	41.5	36.0	24.1	49.8
02605413	13	1.50	12.5	50.2	45.8	19.9	32.3
02605416	16	2.31	16.0	59.6	57.3	16.8	18.6
02605420	20	3.67	20.0	73.3	71.0	13.6	12.0

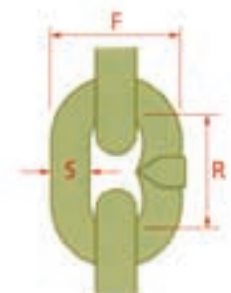

## LONG LINK PROOF COIL CHAIN – HOT DIP GALVANISED


Product Code	Chain Size (mm)	ABL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02607403	3	0.05	3.15	22.1	15.7	526.0
02607404	4	0.09	4.00	25.4	18.6	323.0
02607405	5	0.15	5.00	29.8	22.0	204.0
02607406	6	0.26	6.30	33.5	26.2	127.0
02607408	8	0.46	8.00	41.5	32.0	82.6
02607410	10	0.75	10.00	50.3	40.4	51.8

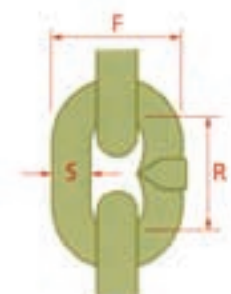


## ANCHOR GRADE L CALIBRATED ANCHOR CHAIN – HOT DIP GALVANISED

PWB Anchor Grade L CHain is also recommended for use in Fathom Chain and mooring applications.


Product Code	Part No.	Chain Size (mm)	ABL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02611006	40074	6	0.40	6.3	18.8	21.6	110.0
02611008	40076	8	0.64	8.0	23.8	27.0	67.8
02611010	40078	10	1.00	10.0	29.8	34.3	43.2
02611013	40080	13	1.70	12.7	38.0	43.0	27.8
02611016	40082	16	2.58	16.0	47.8	54.9	17.5

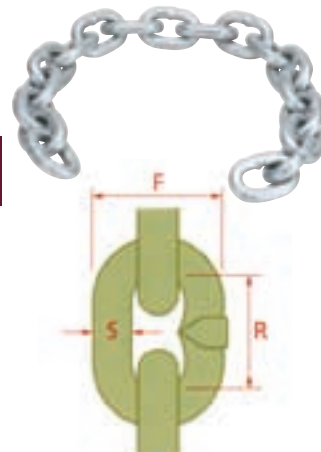

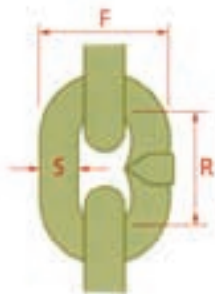

## LONG LINK ALLOY AGRICULTURAL FEED-OUT WAGON CHAIN\* – SELF COLOUR

Product Code	Part No.	Chain Size (mm)	MBL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02619008	42138	8	6.5	8.0	34.0	29.4	79.3
02619010	40243	10	8.0	10.0	50.7	35.5	57.9

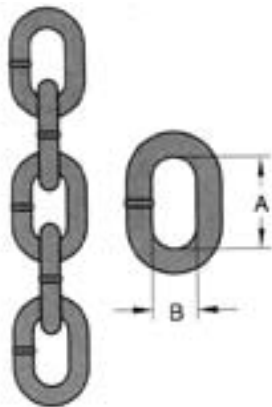

## Catenificio Rigamonti

### RIGAMONTI DIN 766 CALIBRATED CHAIN – HOT DIP GALVANISED

Product Code	Part No.	Chain Size (mm)	ABL (kg)	A (mm)	B (mm)
02611106	C03060DF	6	1.8	18.5	8
02611107	C03070DF	7	2.55	22	9
02611108	C03080DF	8	3.3	24	10
02611210	C03100DF/30	10	5.0	30	15
02611112	C03120DF	12	8.5	36	16
02611113	C03130DF	13	8.6	36	18
02611114	C03140DF	14	9.5	41	19
02611116	C03160DF	16	12.7	45	22



## SHORT LINK PROOF COIL NON-CALIBRATED ANCHOR CHAIN – HOT DIP GALVANISED

Product Code	Chain Size (mm)	ABL (t)	S (mm)	R (mm)	F (mm)	Links /Metre	Metres /100kg
02604208	8	0.64	8.0	23.8	27.0	42.0	70
02604210	10	1.00	10.0	29.6	34.3	33.8	44



## LONG LINK TRAILER SAFETY CHAIN (NZS 5467)

Gold Zinc Passivated.

Product Code	Chain Size (mm)	MBL (t)	S (mm)	R (mm)	F (mm)	Links /Metre	Metres /100kg
02622108	8.0	4.0	8.0	43.3	31.0	23.1	93.4



## REGULAR LINK STAINLESS STEEL CHAIN (AISI 316)

**⚠ NOT SUITABLE FOR LIFTING APPLICATIONS**

Product Code	Chain Size (mm)	MWL (t)	S (mm)	R (mm)	F (mm)	Links /Metre
02624005	5	0.35	5.0	22.0	19.6	45.5
02624006	6	0.50	6.0	26.4	24.0	37.9
02624008	8	0.89	8.0	34.3	30.1	29.2
02624010	10	1.40	10.0	41.5	36.0	24.1
02624013	13	2.75	13.0	50.2	45.8	19.9









## STUD LINK ANCHOR CHAIN

- All Stud Link Chains & Components are Supplied with Lloyds Certification
- Imported to order in Lengths of 27.5 metres

Chain Dia. (in)	Chain Dia. (mm)	Grade U2 (Proof Load Kg)	Grade U2 (Breaking Load)	Grade U3 (Proof Load Kg)	Grade U3 (Breaking Load)	Min. Weight (Kg/27.5m)
1/2	12.5	6,700	9,400	9,400	13,500	95
9/16	14	9,400	11,800	11,800	16,800	120
5/8	16	10,900	15,300	15,300	22,000	155
11/16	17.5	13,000	18,300	18,300	26,100	200
3/4	19	15,300	21,500	21,500	30,700	218
13/16	20.5	17,800	24,900	24,900	35,600	265
7/8	22	20,400	28,600	28,600	40,900	292
15/16	24	24,200	33,900	33,900	48,500	347
1-0	26	28,300	39,700	39,700	56,700	407
1-1/8	28	32,700	45,800	45,800	65,500	473
1-3/16	30	37,500	52,400	52,400	74,900	543
1-1/4	32	42,500	59,400	59,400	84,900	617
1-5/16	34	47,700	66,800	66,800	95,600	697
1-7/16	36	53,300	74,600	74,600	107,000	781
1-1/2	38	59,200	82,800	82,800	118,000	890
1-9/16	40	65,300	91,400	91,400	131,000	964
1-5/8	42	71,700	100,000	100,000	143,000	1,063
1-3/4	44	78,400	110,000	110,000	157,000	1,166
1-13/16	46	85,300	119,000	119,000	171,000	1,275
1-7/8	48	92,600	130,000	130,000	185,000	1,388
2-0	50	100,000	140,000	140,000	200,000	1,506
2-1/16	52	108,000	151,000	151,000	215,000	1,629
2-1/8	54	116,000	162,000	162,000	231,000	1,757
2-3/16	56	124,000	174,000	174,000	248,000	1,889
2-5/16	58	132,000	185,000	185,000	265,000	2,026
2-3/8	60	141,000	198,000	198,000	282,000	2,169
2-7/16	62	150,000	210,000	210,000	300,000	2,315
2-1/2	64	159,000	223,000	223,000	319,000	2,467
2-5/8	66	169,000	236,000	236,000	337,000	2,624
2-11/16	68	178,000	250,000	250,000	357,000	2,786
2-3/4	70	188,000	263,000	263,000	376,000	2,952
2-7/8	73	203,000	285,000	285,000	407,000	3,210
3-0	76	219,000	307,000	307,000	438,000	3,479



STUD LINK ANCHOR CHAIN & COMPONENTS

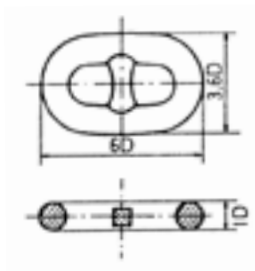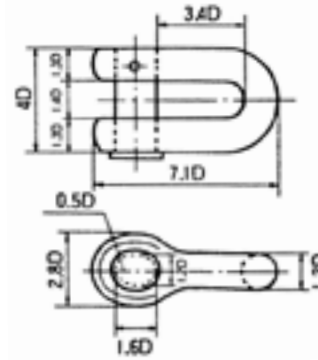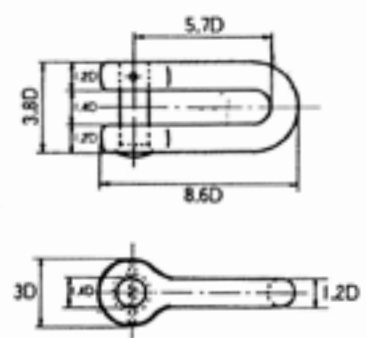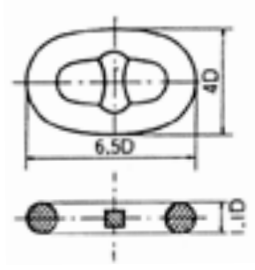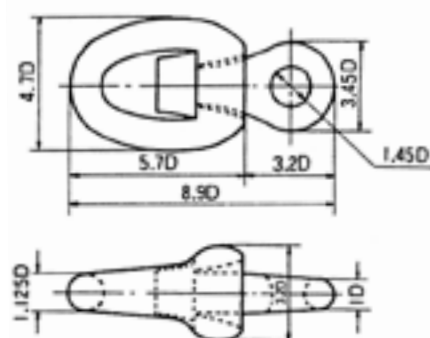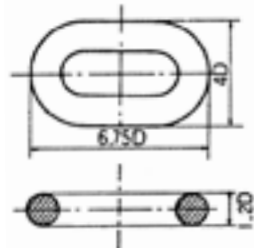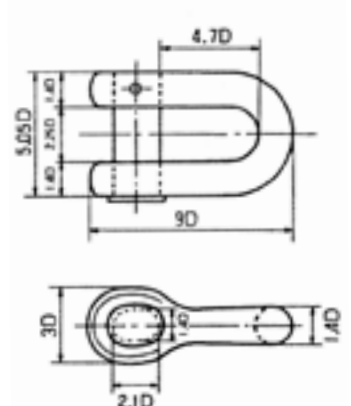
 <p>Common Link (C)</p>	 <p>Joining Shackle (JS)</p>	 <p>Chain Locker Shackle (CS)</p>
 <p>Enlarged Link (EL)</p>	 <p>Kenter Shackle (KS)</p>	 <p>Swivel (SW)</p>
 <p>End Link (E)</p>		 <p>Anchor Shackle (AS)</p>

SECOND HAND STUD LINK ANCHOR CHAIN

- Suitable for both boat mooring and mussell farm use, second hand stud link chain is generally stocked in sizes 32mm through to 50mm diameter.
- Sizes and quantities on hand are dependant on worldwide availability and fluctuate accordingly. Contact your nearest Cookes Branch to ascertain current stockholding.
- Second hand stud link chain will be cut to required length/s.

## TRAWLEX SWIVEL TXSW

Product Code	Part No.	Chain Dia. (mm)	R (mm)	W (mm)	D (mm)	B (mm)	S (mm)	Weight (kg)
02428013	TXSW13	13	127	94	41	51	22	1.93
02428016	TXSW16	16	162	111	51	60	29	3.29



## TRAWLEX DOUBLE NIBBLED LINK TXDR

Product Code	Part No.	Chain Dia. (mm)	A (pitch)	B (width)	Weight (kg)
02434013	TXDR13	13	108	54	0.89
02434016	TXDR16	16	127	63	1.6



## TRAWLEX RECESSED LINK TXRL

• Note: 19-22mm sizes available upon request.

Product Code	Part No.	Chain Dia. (mm)	R (mm)	W (mm)	D (mm)	B (mm)	S (mm)	Weight (kg)
02429013	TXRL13	13	125	117	63	84	22	1.6
02429016	TXRL16	16	156	156	89	108	27	2.72



## TRAWLEX KELLY'S EYE TXKE

• Note: 19-22mm sizes available upon request.


Product Code	Part No.	Chain Dia. (mm)	R (mm)	D (mm)	S (mm)	Weight (kg)
0243206	TXKE16	16	187	95	28	4.42



## TRAWLEX 'G' HOOK TXG

• Note: 19-22mm sizes available upon request.

Product Code	Part No.	Chain Dia. (mm)	R (mm)	T (mm)	W (mm)	Weight (kg)
02430013	TXG13	13	82	16	106	1.51
02430016	TXG16	16	100	20	114	2.38

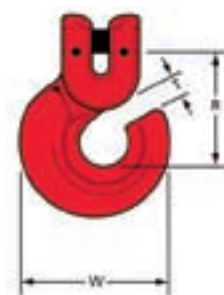



**weissenfels**

**GRADE 80 MID-LINK TRAWL CHAIN – SELF COLOUR**

Product Code	Chain Size (mm)	MBL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02635013	13	21.4	13	52	46	29.4
02635016	16	32.2	16	64	57	19.6
02635219	19	45.4	19	76	67	14.1

**GRADE 80 LONG-LINK TRAWL CHAIN – SELF COLOUR**

Product Code	Chain Size (mm)	MBL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02636009	9	10.0	9	53	33	71.4
02636011	11	15.0	11	64	40	47.6
02636213	13	21.4	13	80	49	37.0
02636016	16	32.2	16	80	60	20.8

**Trawlex**

**PARSONS GRADE 95 MID-LINK “TRAWLEX” CHAIN – SELF COLOUR**

Product Code	Chain Size (mm)	MBL (t)	S (mm)	R (mm)	F (mm)	Metres /100kg
02400516	16	41.0	16	64	56.0	20.5
02400519	19	57.0	19	76	66.5	14.4
02400522	22	75.0	22	86	71.0	10.8

**KUPLEX COMPONENT CONNECTOR TL G80**

A general purpose link for connecting chain to eye-type components.

Product Code	Type/Size Ref.	WLL (t)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kg)
02419007	TL7	1.5	67	47	48	14.3	9	0.11
02419010	TL10	3.2	89	63	64	19.2	13	0.36
02419013	TL13	5.3	118	84	85	26.5	17	0.66
02419016	TL16	8	144	95	106	32.0	19	1.08
02419019	TL19	11.2	168	114	122	38.5	23	1.77
02419023	TL23	16	206	140	150	49.0	28	2.80
02419026	TL26	21.2	230	160	166	57.0	32	4.40
02419032	TL32	31.5	278	209	200	63.0	39	8.40

When a sling is being used in choke hitch with sling legs wrapped round the load and hooked back on a chain or alternatively a choke hook is used, the working load limit should be no more than 80% of that marked.

**weissenfels**

**HARDENED SECURITY CHAIN**

- Manufactured by Weissenfels in Italy, this 10mm chain has a square link and the special hardening process prevents cutting by hack saw or bolt cutters.  
Cut to Required Length.

**⚠ NOT SUITABLE FOR LIFTING APPLICATIONS**

Product Code	Material Size (mm)	Inside Length (mm)	Outside Width (mm)
02397010 (Chain)	10.0	38.1	36.0
02397021 (Padlock)			
02397015 (Sleeving)			

Product Code	Material Size (mm)	Length (metre)
02397592	11.0	1.2
02397595	11.0	1.5

PLASTIC DRUM PAKS  
REGULAR & LONG  
LINK COIL CHAIN  
\*GALVANISED

⚠ NOT SUITABLE FOR LIFTING  
APPLICATIONS



Product Code	Chain Dia. (mm)	10 Litre Certex Pak Length (m)	20 Litre Certex Pak Length (m)	50 Kg Plain Length (m)
Regular Link Proof Coil Chain *Galvanised				
02605403	3	100	200	-
02605404	4	70	140	-
02605405	5	45	90	94
02605406	6	30	60	60
02605408	8	19	38	39
02605410	10	11	22	-
02605413	13	8	15	-
Long Link Proof Coil Chain *Galvanised				
02607403	3	90	180	-
02607404	4	60	120	-
02607405	5	42	85	120
02607406	6	27	54	63
02607408	8	18	36	-
02607410	10	10	20	-

CERTEX SNIG CHAIN

- Grade 70 Gold Zinc Passivated Chain & Fittings
- Grab Hook One End, Lug Link Other End
- Attractively Packaged in a Re-usable Plastic Pail
- Special Lengths Made to Order



Product Code	Chain Size (mm)	Drawbar Pull (t)	Length (m)
02645205	8	2.5	5.0
0245304	10	4	4.0
02645305	10	4	5.0
02645306	10	4	6.0